


Ultra Sharp. Ultra Smooth. **UNMATCHED PERFORMANCE**

Delivering the Sharpest Solvent Prints Ever

New
Launch

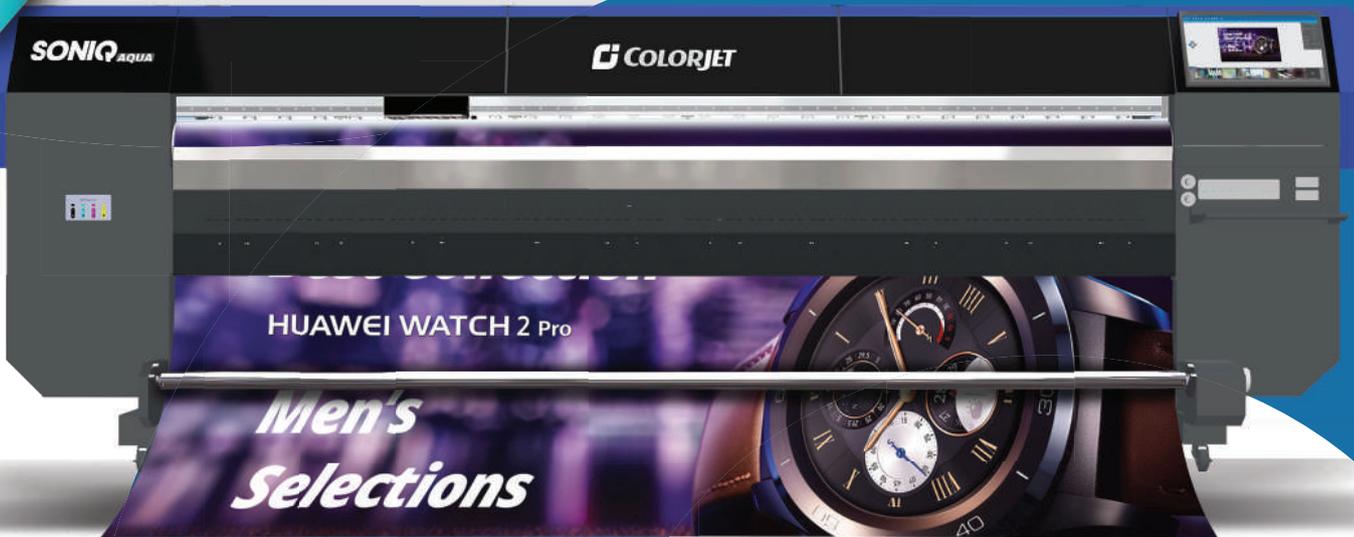

SONIQ **AQUA**
3.2-METER HQ SOLVENT PRINTER

ONLY BY COLORJET
RAISING THE BAR IN
SOLVENT PRINTING TECHNOLOGY



SPECIFICATIONS

SONIQ AQUA				
Model		SC4428	SC8428	
Printing Technology		Drop-on-demand, Piezo electric inkjet		
Print Heads		Konica Minolta Aqua		
No. of Heads		4	8	
Media	Width	3300 mm (129 in.)		
	Thickness	Maximum 1.5 mm (60 mil) with liner (flexible)		
	Roll Outer Diameter	Maximum 300mm (12inch), 50.8 (2 in)		
	Roll Weight	Maximum 90 kgs		
	Core Diameter	76.2mm (3 inch)		
Types		SAV, PVC Banner, Backlit Film, Window Film, Fabric (Solvent Base)		
Printing Width		Maximum 3200mm (126 inch.)		
Inks	Types	Solvent/Mild Solvent inks		
	Colors	4 Colors (CMYK)		
Printing Resolution (Dots Per Inch)		Upto 1440 dpi		
Distance Accuracy		Error of less than ± 0.2 % of distance travelled, or ± 0.1 mm, whichever is greater		
Media Heating System		Pre Heater and Post Heater, setting range for the preset temperature: 30 to 60°C. Dryer setting range for the preset temperature : 30 to 60°C		
Connectivity		High speed USB 3.0 or more		
Power Requirements		AC 220 V $\pm 10\%$, 20 A, 50 Hz		
Dimensions		4689mm X 1079mm X 1571 mm (W x L x H)		
RIP Software		Colorjet edition RIP		
Weight (approx. with stand)		Net Weight : 560 KG, Gross Weight : 820 KG (Approx.)		
Environmental	Power ON	Temperature: 20 to 28°C Humidity: 63 to 83%RH (non-condensing)		
	Power OFF	Temperature: 5 to 40°C Humidity: 20 to 70%RH (non-condensing)		
Modes	Print DPI	Passes	Sqft/Hr (4 Heads)	Sqft/Hr (8 Heads)
Mode 1	540 x 720	2	1050	2130
Mode 2	540 x 1080	3	700	1410
Mode 3	540 x 1440	4	525	1050
Mode 4	540 x 1080	6	350	700
Mode 5	540 x 1440	8	260	500

COLORTECH INDIA SOLUTIONS

Contact us : colortechindiasolutions@gmail.com | +91-9810047561